

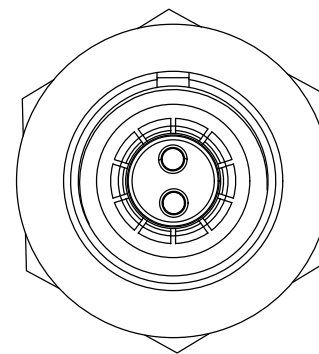


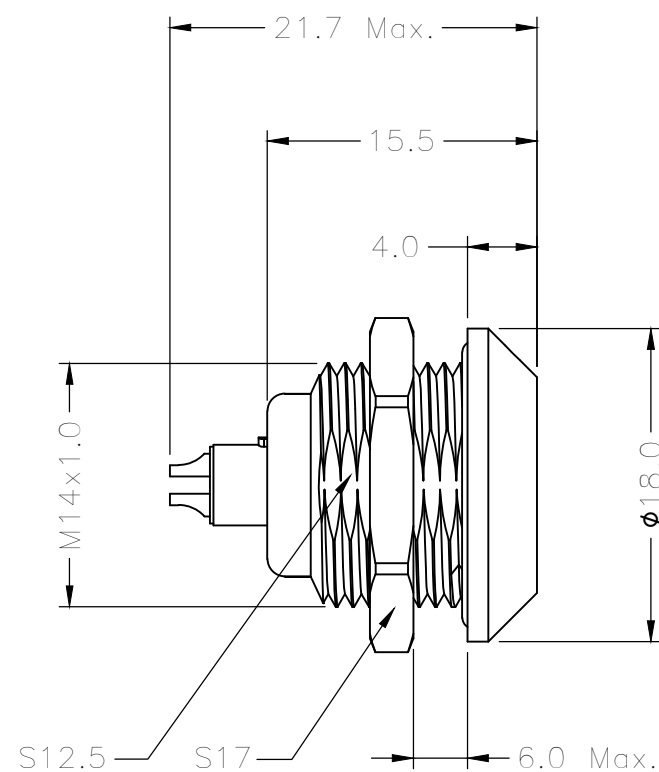

OK METAL CIRCULAR ASSEMBLY P/N DESCRIPTION :

OK A F2 X X XX X 00 C
① ② ③ ④

- ① Insert
P=PEEK
1=PPS
- ② Plating
2=High Gold
A=Gold flash
- ③ Number of contacts
02=2Pin
.....
09=9Pin
- ④ Keying
G= 0° D= 95°
A= 30° E= 120°
B= 45° F= 145°
C= 60° L= 75°

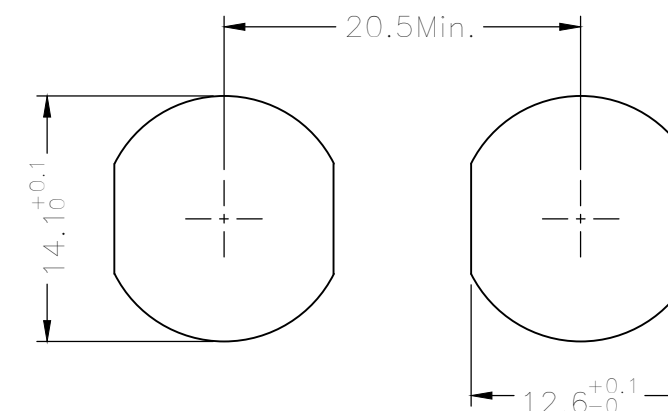

PANEL CUT-OUT

NOTE:

1. MATERIAL:

1.1.SHELL ASSEMBLY: COPPER ALLOY,OUTER SHELL Cr PLATING,
OTHER METALLIC COMPONENTS Ni PLATING


1.2.INSERT: THERMOPLASTIC,UL94V-0

1.3.CENTER CONTACT : COPPER ALLOY,Au PLATING

1.4.O-RING : ELASTOMER


2.NUMBER OF CONTACT : 2 TO 9 POSITION

3.RoHS DIRECTIVE COMPLIANCE

THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED		 Dongguan Circon Technology Co.,Ltd.			
							
UNITS ☒ mm ☐ INCH		0 PLC ± 1.00		TITLE: OK METAL CIRCULAR CONNECTOR FIXED SOCKETS			
ANGLES 0 PLC ± 3 1 PLC ± 2		1 PLC ± 0.50					
		2 PLC ± 0.25					
		3 PLC ±					
		4 PLC ±		C DRAWING NO. A-M-047 REV. A0			
APPROVED BY JACK		DATE	2019-1-16				
CHECKED BY CHARLES		DATE	2019-1-16				
DRAWN BY ANDY		DATE	2019-1-16	SIZE: A3		SCALE: 1:1	SHEET: 1 OF 2

VIEW FROM TERMINATION SIDE PIN PART


2 POS.




3 POS.




4 POS.




5 POS.




6 POS.



7 POS.




9 POS.




KEYING ANGLES (RECEPTACLE FRONT VIEW):


0°

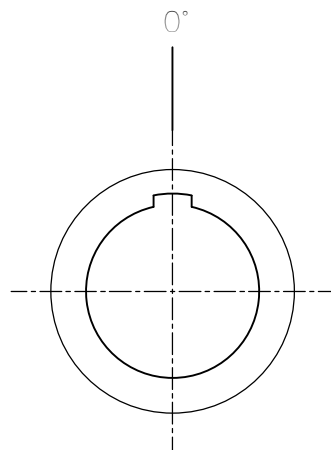


30°

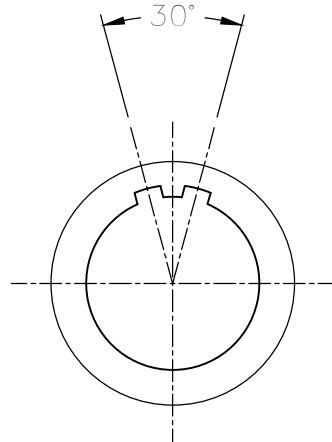


45°

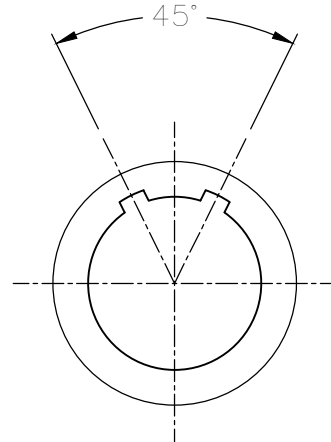


60°

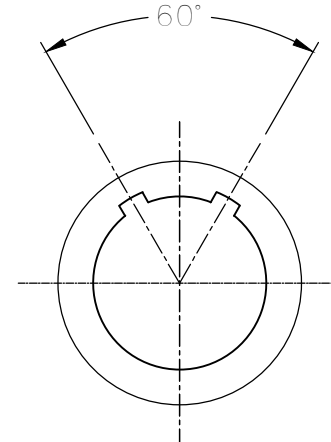


120°

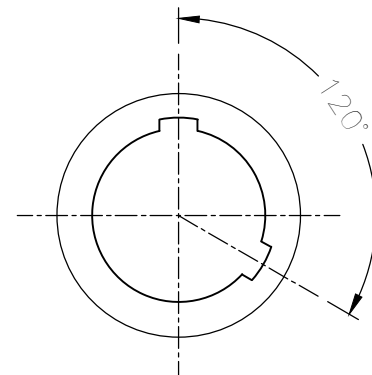


145°

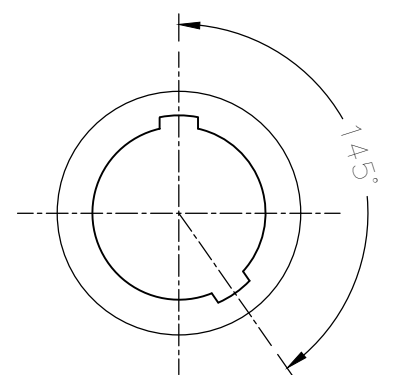


75°

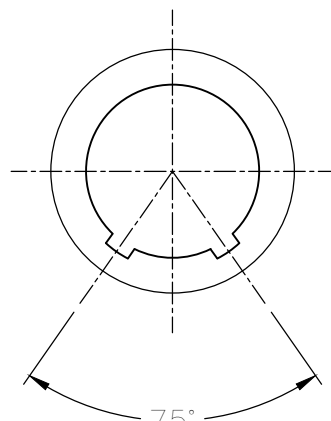

95°

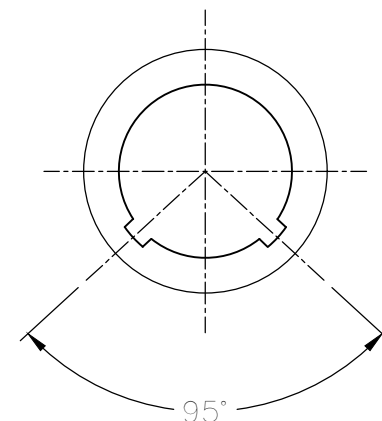

THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED		 Dongguan Circon Technology Co.,Ltd.			
		0 PLC ± 1.00 1 PLC ± 0.50 2 PLC ± 0.25 3 PLC ± 4 PLC ±		TITLE: OK METAL CIRCULAR CONNECTOR FIXED SOCKETS			
UNITS ☒ mm ☐ INCH				C	DRAWING NO.	A-M-047	REV.
ANGLES 0 PLC ± 3 1 PLC ± 2					PART NO.	OKAF2XXXXX00C	A0
APPROVED BY	JACK	DATE	2019-1-16				
CHECKED BY	CHARLES	DATE	2019-1-16				
DRAWN BY	ANDY	DATE	2019-1-16	SIZE: A3	SCALE: 1:1	SHEET: 2 OF 2	